

PRINT THIS GUIDE



Print this guide being sure to maintain its original dimensions. This page must be printed on A4 paper. In Print Setup be sure to resize it to 100%. Deselect, if necessary, Adapt and Centre). After printing, to be sure everything is OK, take a ruler and measure the example.

It should measure exactly 0,118"





HOW TO TAKE MEASUREMENTS?

1 RING - (JEWELLER)

Go to any jeweller / goldsmith / jewellery workshop and get your finger measured. Then compare the measurement obtained with the MYRING size using the table we give you in this guide (page 4).

2 RING - (SUPERIMPOSING)

If you have a ring of the correct size for the finger on which you will wear your MYRING creation, you can superimpose it on one of the circles in the measurement module. Instructions on page 2.

3 ANELLO / BRACCIALE - (MYSIZER)

Cut out MYSIZER, a practical way to measure your finger or wrist. Instructions on page 3.

USEFUL TIPS

Try not to take measurements when your hands are very cold or very hot — the size of your finger changes depending on body temperature and blood pressure. When you are cold it tends to shrink and when you are hot, it swells. We recommend taking measurements at different times of the day (morning/afternoon/evening) in order to highlight the maximum measurement reached and use that as your final size.

Measuring the ring:

- If you decide to use method 2. SUPERIMPOSING and your ring is between two sizes (e.g. 20 and 21), we recommend you consider the larger size, in this case 21.

If you decide to use method 3. MYSIZER and your ring is between two numbers on the scale (e.g. 20 and 21), we recommend you consider the larger size, in this case 21.

Measuring the bracelet:

- If you decide to use method 2. MYSIZER and the result is between two sizes (e.g. SMALL – 14.5 – MEDIUM) we recommend you consider the smaller size (SMALL) if you prefer a tighter fit to your wrist, or the larger size (MEDIUM) if you prefer a looser fit. This is because the bracelet, being supple, can be modified by tightening or enlarging.

Should you need to alter the size of your ring, this can be easily done by any jeweller / goldsmith / jewellery workshop. This job is neither complex nor costly.

2 SUPERIMPOSING THE RING

DO NOT PLACE THE RING DIRECTLY ON THE SCREEN – THE SIZE WOULD NOT BE RIGHT.
Instead, use a plain wedding ring and superimpose it on the circles.




The inside edge of your ring IS NOT IN LINE with the outside line of the circle. Choose a narrower size.




The inside edge of your ring IS NOT IN LINE with the outside line of the circle. Choose a larger size.



The inside edge of your ring IS IN LINE with the outside line of the circle. The size is correct.

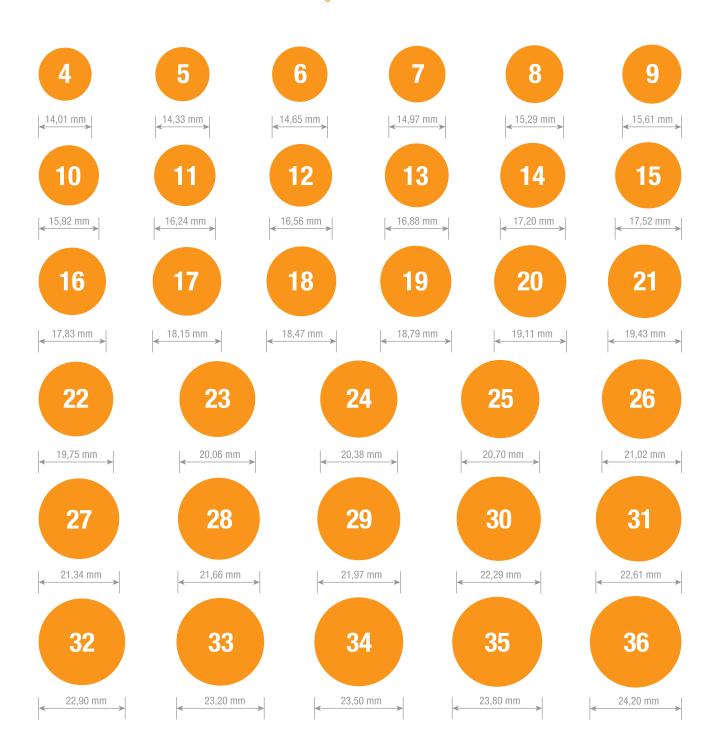

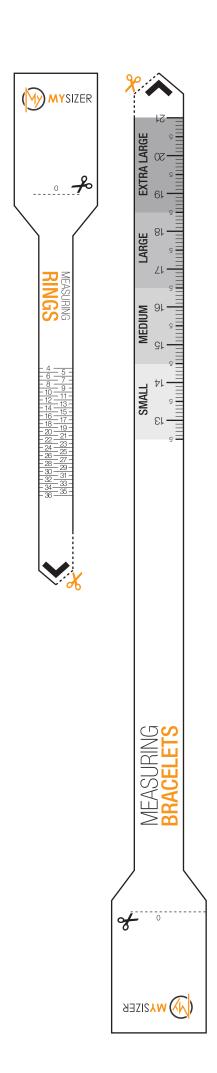

3 MYSIZER CUTOUT

- 1. Cut out the MYSIZER beside this text.
- 2. Make a small slit cutting precisely along the dotted line shown as:



- 3. Pass the end of MYSIZER shown by the arrow \to through the slit cut previously to make a loop.
- 4. Place MYSIZER on the broadest part of your finger, so the ring can be properly slipped up to where you want it; or at the place on your wrist where you want to wear the bracelet.
- 5. Tighten around your finger or wrist as necessary, so that it adheres completely to the surface.
- 6. Note down the measurement number corresponding to ______ or the ring of your finger, or the size corresponding to the bracelet for your wrist.



RING

In the above example the number 30 corresponds perfectly to the dotted line ... •

This is the measurement you should consider for the ring.

BRACELET

To measure the bracelet, you should note in which colour band the dotted line ________ fails.

Sizes are: SMALL - MEDIUM - LARGE - EXTRA LARGE

TABLE OF RING MEASUREMENTS

Depending on your nationality and different decimal metric system, compare the measurement obtained using method 1. jeweller / goldsmith / jewellery workshop with the corresponding MYRING measurement. If you used method 2. SUPERIMPOSING or 3. MYSIZER, consider the measurement that already corresponds with MYRING.

MYRING	Ø Diameter [mm]	Circumference [mm]	DEUTSCH	FRANCE	UK	USA
4	14,00 - 14,10	44,00 - 44,30	-	44	F	3
5	14,20 - 14,40	44,60 - 45,20	-	45	F	3
6	14,50 - 14,70	45,60 - 46,20	15	46	G	3,5
7	14,80 - 15,10	46,50 - 47,40	15	47	Н	4
8	15,20 - 15,40	47,80 - 48,40	15	48	I	4,5
9	15,50 - 15,70	48,70 - 49,30	16	49	J	5
10	15,80 - 16,00	49,60 - 50,30	16	50	К	5,5
11	16,10 - 16,30	50,60 - 51,20	16	51	-	-
12	16,40 - 16,60	51,50 - 52,20	16	52	L	6
13	16,70 - 17,00	52,50 - 53,40	17	53	M	6
14	17,10 - 17,30	53,70 - 54,40	17	54	N	6,5
15	17,40 - 17,60	54,70 - 55,30	17	55	0	7
16	17,70 - 17,90	55,60 - 56,20	17	56	Р	7,5
17	18,00 - 18,20	56,50 - 57,20	18	57	-	-
18	18,30 - 18,60	57,50 - 58,40	18	58	Q	8
19	18,70 - 18,90	58,70 - 59,40	19	59	R	8,5
20	19,00 - 19,20	59,70 - 60,30	19	60	S	9
21	19,30 - 19,50	60,60 - 61,30	19	61	Т	9,5
22	19,60 - 19,80	61,60 - 62,20	20	62	U	10
23	19,90 - 20,10	62,50 - 63,10	20	63	V	10,5
24	20,20 - 20,50	63,50 - 64,40	20	64	-	-
25	20,60 - 20,80	64,70 - 65,30	20	65	W	11
26	20,90 - 21,10	65,70 - 66,30	21	66	Х	11,5
27	21,20 - 21,50	66,30 - 67,50	21	67	Y	12
28	21,60 - 21,80	67,90 - 68,50	21	68	-	-
29	21,90 - 22,10	68,80 - 69,40	22	69	Z	12,5
30	22,20 - 22,40	69,70 - 70,40	22,5	70	Z+1	13
31	22,50 - 22,70	70,70 - 71,30	22,5	71	Z+2	13
32	22,80 - 23,00	71,60 - 72,20	23	72	Z+3	13,5
33	23,10 - 23,30	72,50 - 73,10	23	73	Z+4	13,5